



Tier1

BloombergNEF


Power the future

TOPCon 210R BIFACIAL

560-575W

High efficiency bifacial modules

· Silver frame, White mesh

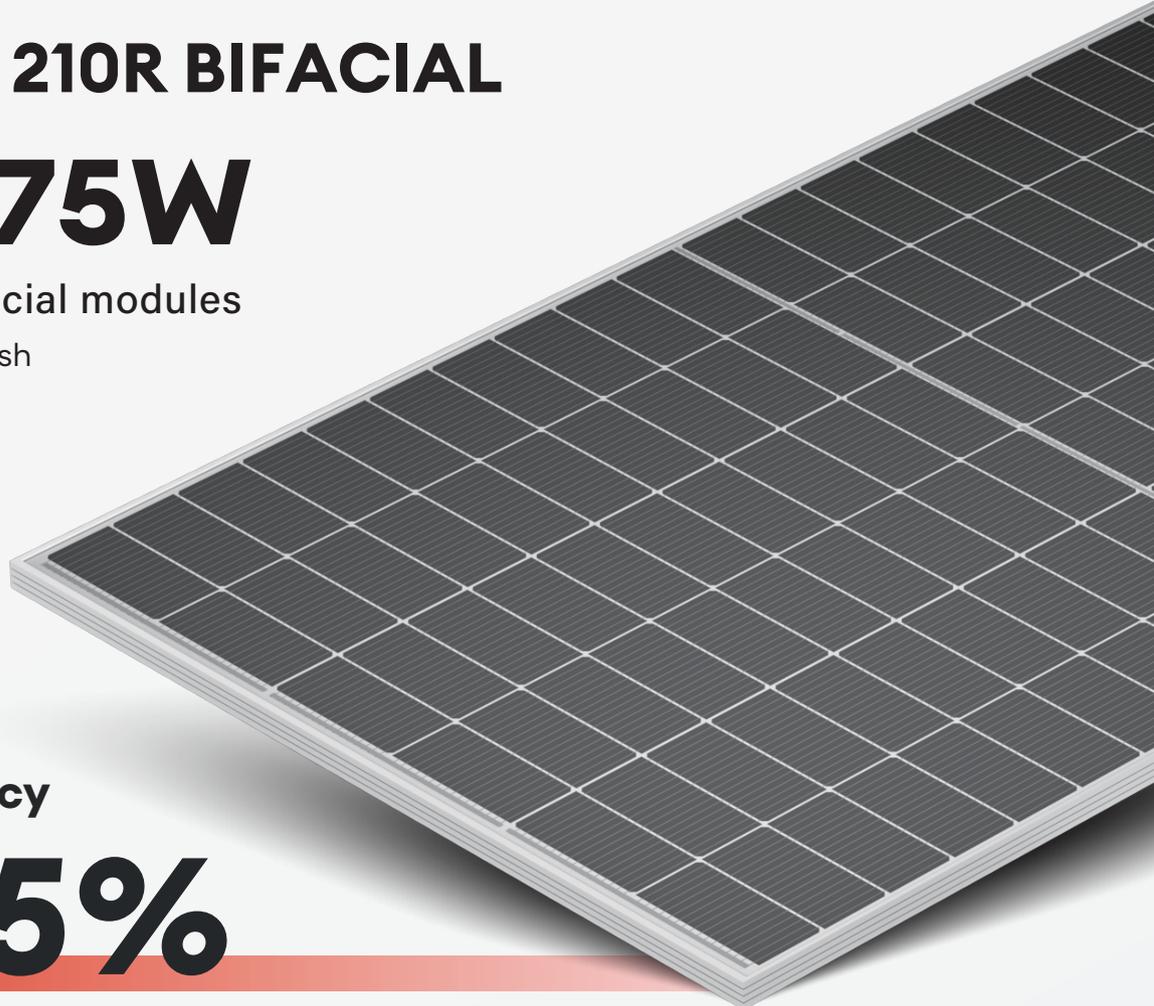

 UTILITY

 C&I

Module efficiency

23.35%



Better leveled cost of energy



Better high temperature stability




Improved low-light performance



Excellent bifacial performance

Linear performance guarantee for 30 years

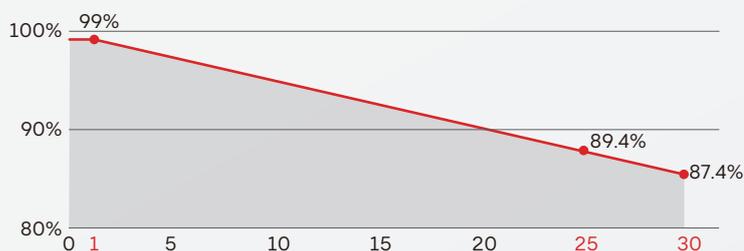

WARRANTY

Quality Guarantee **25** years

Power Warranty **30** years

CERTIFICATE



ELECTRIC CHARACTERISTICS

SPDG (560/575W)-N120R12

Model of modules	SPDG560-N120R12		SPDG565-N120R12		SPDG570-N120R12		SPDG575-N120R12	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	560	423.60	565	427.60	570	431.8	575	435.9
Maximum power voltage (Vmp)	37.29	35.00	37.52	35.20	37.75	35.5	37.98	35.7
Maximum power current (Imp)	15.02	12.11	15.06	12.14	15.1	12.18	15.14	12.21
Open circuit voltage (Voc)	44.56	42.20	44.79	42.50	45.02	42.7	45.25	43
Short circuit current (Isc)	15.91	12.81	15.95	12.84	15.99	12.88	16.03	12.91
Module efficiency	22.74%		22.94%		23.14%		23.35%	

STC (Electrical parameters at standard test conditions. STC:AM=1.5, 1000W/m² ,Cells Temperature25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C,AM1.5,Wind Speed 1m/s)

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Front power Pmax/W	644.00	649.75	655.50	661.25
Maximum power voltage (Vmp)	37.29	37.52	37.75	37.98
Maximum power current (Imp)	17.27	17.32	17.36	17.41
Open circuit voltage (Voc)	44.56	44.79	45.02	45.25
Short circuit current (Isc)	18.30	18.34	18.39	18.43

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2172x1134x35mm
Weight	29.5kg
Cell	120 cells,N type Mono-Crystalline , 182.2mm×105 mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm ²
Wire length	Line length 1300mm/customized
Connector	MC4 Compatible
Packing Specification	31 pcs/Pallet ; 620 pcs/40' HQ


OPERATING PARAMETERS

Power tolerance (W)	(0~+5W)
Maximum system voltage (V)	1500V
Maximum rated fuse current (A)	30A
Current operating temperature (C)	-40~+85°C
Mechanical load	+5400Pa/-2400Pa


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.045% / °C
Temp. Coeff. of Voc (TK Voc)	-0.25% / °C
Temp. Coeff. of Pmax (TK Pmax)	-0.30% / °C
Normal Operating Cell Temperature	45±2°C

MODULE DIMENSIONS(MM)

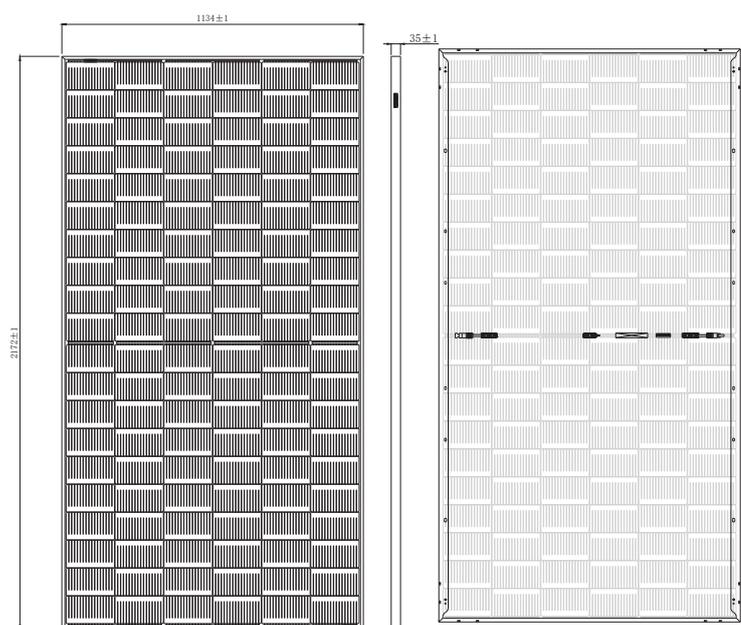

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

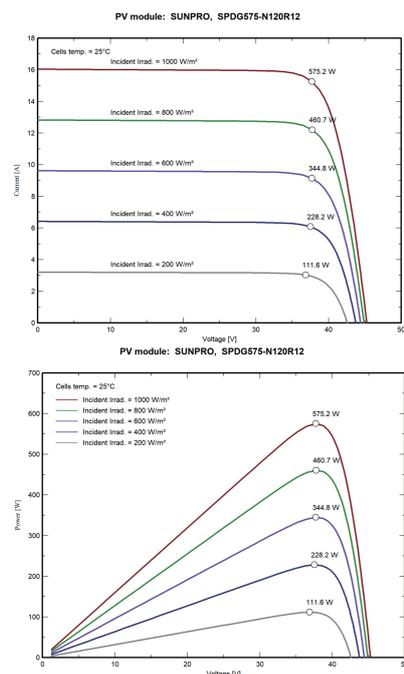

Zhejiang Sunpro Power Technology Co., Ltd

Add: Qinggang Industrial Zone, Yuhuan City, Zhejiang Province

Tel: +86 0576-80730906 E-mail: info@sunpropower.com Website: www.sunpropower.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail